# LED Canopy Light- SP 2025 DLC PREMUIM

## 360All for One Design

With one design, it gives solution for all your needs in public illumination, industrial illumination and commercial illumination, simply by changing different mountings for street light, tunnel light, canopy, high bay light, park light and flood light!

### Superior Performance

World Top Nichia LED with efficiency up to 140lm/w Match with high Efficiency driver up to 94%, pfc>0.9 Together with the special designed thermal management, achieve superior system efficiency at least 110 lm/w.


## Reliable Quality Assurance

Aluminum housing and high heat conductive alloy modular bar in a special designed air flow thermal management system

with built in protection for short circuit / overload/ over voltage / over temperature Backed up 5-5-10 years warranty







## **Ordering Information**

Example SP-2025 - 40w - 2B- 40K- 17-MV-N.SLV.DIM

Model	System Power	Modular	Color	Optics	Voltage	Options
SP-2025 Canopy light	40w 60w 100w 120w 150w 200w 250w	2B 2 modular bar 3B 3 modular bar 4B 4 modular bar 5B 5 modular bar 6B 6 modular bar 7B 7 modular bar	<b>40K</b> 4000K <b>50K</b> 5000K <b>57K</b> 5700K	TI Type I 17 170D 80 80D RB Rack B 40 40D 20 20D B1 BAT1 BS Batshape B3 Bat360	MV 100-240/277v HV 347/480v <sup>1</sup> DC 12/24vDC <sup>2</sup>	LED brand <sup>3</sup> N Nichia S Singbee Housing Color <sup>4</sup> SLV silver BLK black BRZ bronze WHI white Others <sup>5</sup> DIM dimming PH photocell MS motion senso

- 2.12/24v DC, normally supply in 40w/60w, for wattage below 40w or over 60w, contact for more detail
- 3. Nichia is standard LED brand, other brand such like CREE is available on request
- 4. Silver is standard housing color, other color that is not shown here can be customized on request
- $5. This is \ mainly \ the \ accessories \ to \ go \ with \ the \ light, \ there \ is \ more \ available, for \ detail \ please \ see \ our \ 360 \ wing \ catalogue$


















IK10



**Green Planet LED MI USA** 

# 5-5-10 Years Warranty ErP Energy rated A++ Nichia LED / Meanwell HLG Driver



Performance Summary

Patented 360 Technology

Nichia LED directly from Japan Headquarter

CRI: Minimum 70 CRI

CCT: 4000K, 5000K, 5700K (+/- 300K)

Limited Warranty<sup>1</sup>: 5 years on LED, 5 years on driver,

10 years on housing.

Rated life<sup>2</sup>: L70@150,000hours

**Electrical System** 

Input Voltage: Standard 100-277V, 50/60Hz 347-480vAC or 12/24vDC on request


Power Factor(PFC): > 0.9 at full load

Total Harmonic Distortion(THD): < 15% at full load

Singbee Circuit Technology protect the luminaries in function


even when 1 led failure.

3 in 1 Dimming available with less than 10% control Compatible with zigbee / photocell / motion sensor<sup>3</sup>





## Performance


System Power	Modular	4000K System Lumen <sup>4</sup>	X Dimension	Net Weight
40W 60W	2 Bar	4814 lm 6687 lm	272mm / 10.7"	6.1kg / 13.45 lb 6.1kg / 13.45 lb
100W	3 Bar	11313 lm	343mm / 13.5"	8.6kg / 18.96 lb
120W	4 Bar	13743 lm	414mm / 16.3"	9.3kg / 20.50 lb
150W	5 Bar	17067 lm	485mm / 19.1"	10kg / 22.05 lb
200W	6 Bar	22779 lm	556mm / 21.9"	12.1kg / 26.68 lb
250W	7 Bar	27913 lm	627mm / 24.7"	13.4kg / 29.54 lb

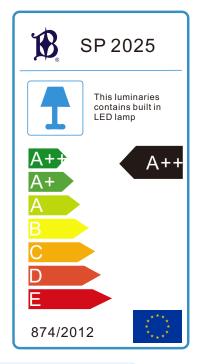


## **Light Distribution**











Available upon request

To obtain an IES file, please download from Singbee website or contact us for a dialux simulation

## **Housing Painting Colors**



Silver PANTONE Cool Gray 5C



PANTONE

Bronze PANTONE



### Notes:

- See 360 warranty terms
- 2. Based on LM80 and ISTMT testing by a NVLAP accredited laboratory under worst case models from 360 series.
- 3. For the detail of the optional accessory, see our accessory catalogue
- 4. All light output above are based on testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory.