



LED WALL MOUNT

by Hyperikon®



5 Year
Warranty



CRI 85+



Brightness
2300 Lumens



Lifespan
45,000+ Hrs



Voltage
120/120-277 V



Efficacy
92 Lm/W



UV free
Mercury free



Damp location
suitable



Angle Beam
90°

- Device complies with Part 15 of the FCC Rules
- Device has been tested and found to comply with the limits for a class B digital device
- The driver range is 100-277V
- All products are dimmable, unless otherwise specified



(888) 846-4973

info@hyperikon.com

9393 Waples St, Suite 120
San Diego, CA 92121

www.hyperikon.com



Hyperikon's Wall Mount is an energy-efficient product that promotes uncompromising safety and security in outdoor commercial and industrial environments. This fixture balances the technical needs of a sophisticated LED system with the functional demands of a robust outdoor fixture facing year round weather hazards.




SPECIFICATIONS

Hyperikon Code	Model Name	Wattage	Voltage	Lumens	Efficacy	Kelvin	Beam Angle	CRI
541021005	HyperWallmount25-502	25W	120V	2300Lm	92Lm/W	5000K	90°	85+
541031005	HyperWallmount25-501	25W	120-277V	2300Lm	92Lm/W	5000K	90°	85+



MODEL DESIGN

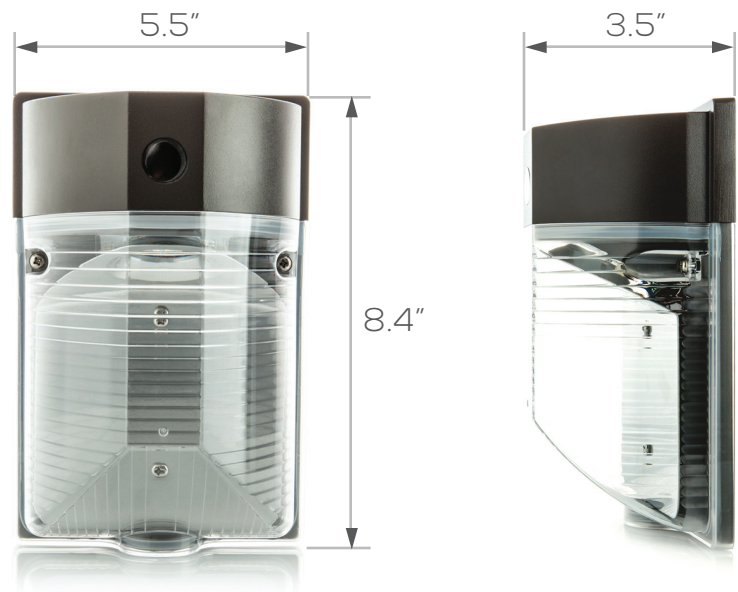

ACCESSORIES

Photocell included with the following model: 541021005



WARNINGS AND CAUTIONS

- Turn power off before inspection, installation or removal. Risk of electric shock - do not use where directly exposed to water or weather.
- Suitable for damp locations outside as well as inside.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.

