

# T8 Direct replacement lamps



G13

FA8



Rotary G13

R170

## Features>>

- ◆ Perfect compatibility with instant start electronics ballast with no floating power
- ◆ Work well with with Magnetic ballast
- ◆ Work with AC100-277V electronic ballast or AC347V ballast
- ◆ Work with AC100-277V city voltage directly,two-ends power
- ◆ Highly energy efficiency, meet the requirement of ERP and DLC
- ◆ Power factor: same as ballast in use, usually>0.95
- ◆ High-tech optical design

## Dimension>>

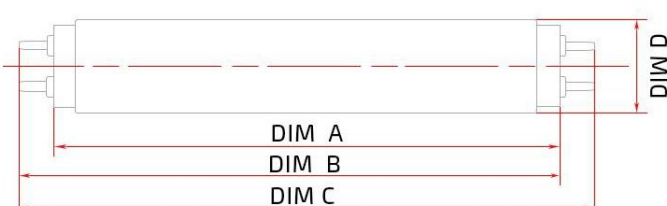

Model	DIM A (mm)	DIM B (mm)	DIM C (mm)	DIM D (max)
4FT	1198	1205.5	1213	28.6

## T8 ballast compatible tube

4ft linear lamp

### Certification >>



### Advantage>>


	AluminTium thickness	Aluminium	Efficiency	Driver	Cover	PCB and wire	Warranty
SEPICN'S tube	>0.83mm	pure aluminium	120lm/w	UL driver	UL V0 fireproof grade	UL standard	5years/DLC
Other 's tube	0.6mm	impurity Aluminium	90lm/w	fake UL driver	not UL fireproof grade	not UL standard	3years

### Specification>>


Model	Power	Voltage (V)	CCT (K)	LED Type (SMD)	LPW (lm/W)	Beam Angle	Material	Certification	Warranty
HC-T8-4FT-18W-ID-C	18W	110-277	3000-6500	2835	100-120	120°	Al+ PC	UL cUL DLC	5years

### Installation>>


Work with Electronic ballast directly

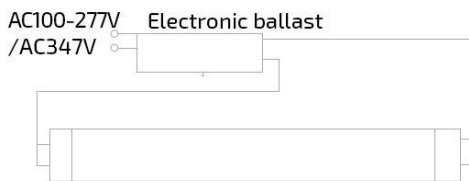

Work with Magnetic ballast directly

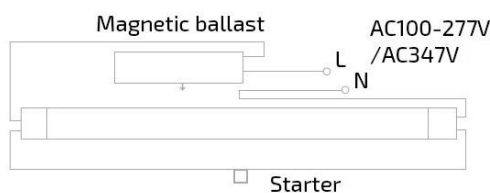

Work without ballast

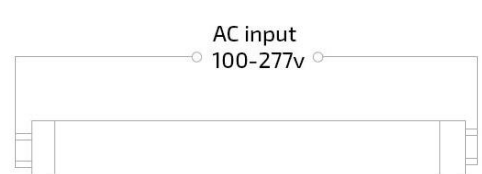

### Package>>

Model	Unit weight(kgs)	PCS/CTN	G.W.(kgs)	Size(mm)
4FT	0.68	25	16	1270*240*240

